



CHAIN PULLEY BLOCK

INDEF-C BLOCK

FEATURES



- Offers Safe Working Load up to 20t and a height of lift up to 40 meters
- Grade 80 load chain for enhanced strength and resistance to wear and tear
- Maintenance-free, self-sustaining friction brake
- Double chain guide rollers
- Finishing cover coated with anti-corrosion powder
- Components are zinc plated

USPs

- CE and ISI certified product
- Made-in India product
- EX/ATEX/Spark-proof Design
- Reduced operating pull
- Availability of genuine spare parts and service
- Lightweight and strong

BENEFITS

- High operating efficiency and reduced downtime
- Longer working life
- Ensured quality and reliability
- Aesthetic appeal
- Product that is safe and easy to use with minimal maintenance

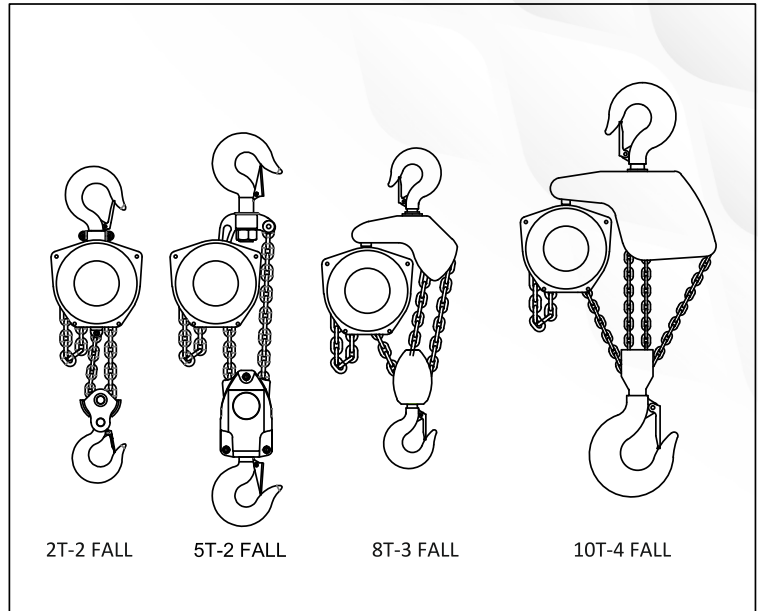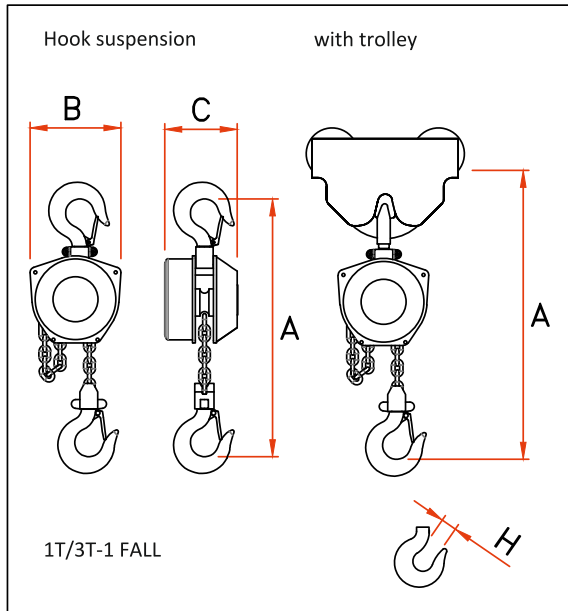

CAPACITY(T)	MT	1T	2T	3T	5T	8T	10T
Number of falls of load chain	Nos.	1	2	1	2	3	4
Load Chain size Dia.	mm	6.3	6.3	10	10	10	10
Hand Chain size Dia.	mm	5	5	5	5	5	5
A Hook suspension	mm	380	450	535	805	830	850
with trolley, range1&2	mm	430	500	705	895	980	880
with trolley, range3	mm	470	540	720	895	980	880
B	mm	161	161	228	280	430	480
C	mm	130	130	175	209	220	220
H	mm	31	32	42	51	75	75
• Weight at 3 M Lift	Kg.	10	11	20	59	94	130
• Extra weight per additional M lift	Kg.	1.8	2.6	3.0	5.7	7.9	10.1
• Running pull on hand chain	Kg.	25	28	34	41	46	43
• Velocity ratio		45	90	78	156	234	312

Data tolerance $\pm 10\%$

Note :- Due to continuous development and improvement specification listed above may be changed without notice.

